

# Pugmill G49E

## Overview and technical data



Picture shows model G49E, see other models on [www.cebex.se](http://www.cebex.se).

- Specially designed for the small studio or educational environment.
- Vertically split body for easy cleaning.
- Cast aluminium barrel and blades preventing contaminated clay due to corrosion.
- Thermal overload safety switch as a standard, preventing motor overload.
- Hopper Safety Grid included (can be replaced with interlock-switch for easy operation).

## Allmänt

The pug mill is a machine in which plastic clays are mixed and extruded into a thoroughly mixed and homogeneous body in a few seconds, and the right machines can be matched to the right application by considering the factors of size of production, drive assembly, inlet, discharge, cost and maintenance.

Some pugmill models are also equipped with a vacuum pump that ensures the extruded clay bodies have no entrapped air, check our range of pugmills on [www.cebex.se](http://www.cebex.se).


The model G49E pugmill has been specifically designed for the studio or educational environment and, due to the compact design and low weight, the G49E is easily transportable.

As a safety standard, the G49E is fitted with a hopper safety grid and thermal overload safety switch as standard but can also be equipped with an interlock safety switch. This safety switch will replace the safety grid and the start/stop will be controlled with the handle making the pugmill a lot easier to use.



The G49E has a 4-inch (100mm) aluminum body and a 2" (50mm) extrusion, Split body to facilitate easy cleaning.



On-Line Start/Stop with overload safety switch.



Interlock switch (accessory) for easy operation.

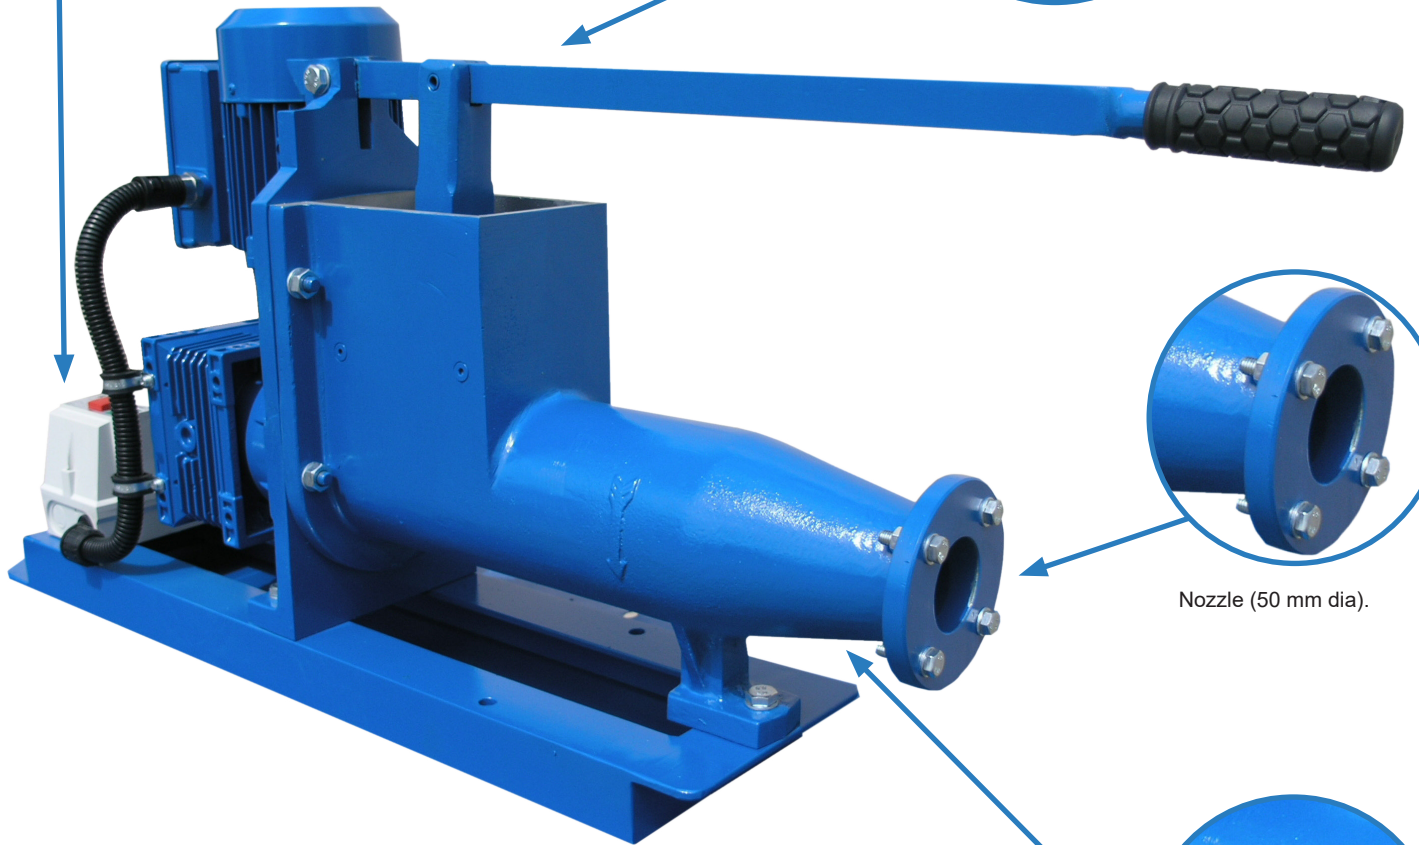

Nozzle (50 mm dia).



Vertically split body to facilitate easy cleaning.



CE marked and compliant with the current EG-regulations.

Model	Item	Outer dimensions			Nozzle	Vacuum	Power	Fuse	Connect	Weight
		L	B	H	Dia	Ja/Nej	kW	A	V	(kg)
All measures in mm										
Pugmill G49E	N/A	800	280	470	50 mm	Nej	0,37	N/A	230	37

We reserve us the right to changes without further notice.

